


## Multi-lamp system (19" rack version)

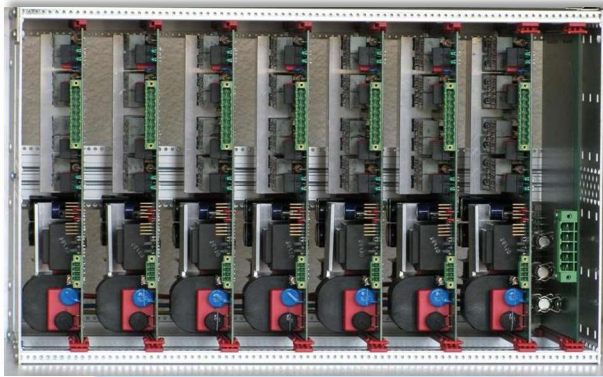

The multi-lamp system provides a convenient solution for controlling of larger lamp circuits (e.g. in disinfection systems).

One system can control between 2 and 60 lamps efficiently.

Ballasts for all lamp types (specified as written below) can be integrated.

Control operates by the main processor. Temperatures and lamp power are monitored this way.

Faults and failures would be displayed immediately.

The programming is applicable by R232 interface (9-pin similar to "COM" port).

Optionally we provide control by USB Ethernet port and by built-in standard browser (e.g. Microsoft Explorer®, Firefox® etc.) with our control software.

It allows access from any laptop (with appropriate interface) easily and conveniently.

### Performance parameters:

Number/ lamp ports: for user-defined lamp quantities

Applicable lamp types: low pressure lamps with lamp power up to 500 W  
(from 2018 lamp power up to 1000 W)